



# MOUNTING OPTIONS

Pistol Model	Accepts SRO	Mount Recommended
Glock® MOS	✓	Requires Mount #AC32085
Custom RMR Cut Glock®	✓	None needed
Smith & Wesson® M&P® C.O.R.E.™	✓	None needed
Springfield® 1XD(M)® OSP™	✓	Requires Mount #AC32085
Canik TP9SFX	✓	None needed
Walter® Q5 Match and PPQ Q4	✓	None needed
Custom Cut 1911 that accepts an RMR	✓	None needed
STI Models that take RMR	✓	None needed
Beretta APX	✓	None needed
CZ P10	✓	None needed
Standard 1911	✓	Requires CA428 and some modification by a gunsmith

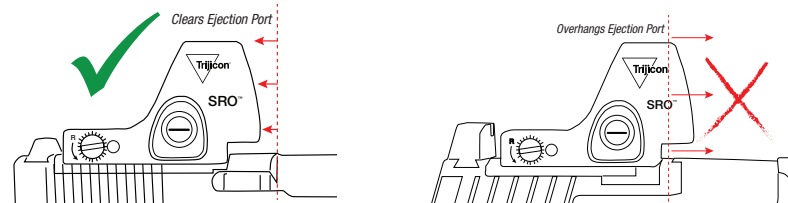


It is not recommended to mount SRO on pistols if the front of the optic overhangs the chamber/breach face as this may cause the pistol to malfunction.

## AVAILABLE RETICLES




1.0 MOA Dot

**Best Use:**  
Long Range and  
Bullseye Shooting



2.5 MOA Dot

**Best Use:**  
Target Shooting,  
Competition, and Hunting



5.0 MOA Dot

**Best Use:**  
Quick Close Shooting


Reticles not shown to scale. For a full view of reticles, please visit our website at [www.Trijicon.com](http://www.Trijicon.com).

## OPTIONAL ACCESSORIES



#AC32085

RMR® / SRO Mounting Kit - Fits Glock® MOS and Springfield OSP Models




#RM44

RMR® Pistol Mount for All Glock® Models (not including Glock MOS slides).




#CA428-C-600757/58/59

1911 RMR Mount w/ Integrated Night Sight Set




#RM45

RMR Pistol Mount for Smith & Wesson M&P




#RM33

Picatinny Rail Mount Adapter for RMR - Low Profile



#RM34W

Weaver Rail Mount Adapter for RMR - Colt Thumb Screw




#AC32074 #AC32075

Full Co-Witness Quick Release Mount Lower 1/3 Co-Witness Quick Release Mount



#AC32078

45° Offset Quick Release Mount



#AC32076 #AC32077

Low Quick Release Mount Low Weaver Quick Release Mount



#RM65

RMR® Mount for 30mm Rifle Scope

For a full list of accessories visit [www.Trijicon.com](http://www.Trijicon.com).



The Trijicon SRO™ is specifically designed for pistol use. The wide field of view and clean, crisp dot makes it easy for users to find and track the dot in both target and competitive shooting applications, helping improve shooting accuracy and speed. Every SRO features both manual and automatic LED brightness modes and a 3-year battery life. These features make the SRO a great choice in any application.

### > EASY TO SHOOT

- Simple dot acquisition
- Track the dot when shooting
- Keep your focus on target
- Increase your shooting speed and accuracy

### > EASY TO USE

- Fits on popular red-dot-ready pistols
- Top loading battery
- Compatible with suppressor height iron sights
- Tool-less adjustments makes zeroing hassle-free

### > EASY TO TRUST

- Intuitive dot illumination control
- Crisp aiming dot with large clear lens
- Forged 7075 aluminum construction
- 3 years of battery life\*



[Trijicon.com/SRO](http://Trijicon.com/SRO)



# KEY FEATURES

Compatible with Suppressor Height Iron Sights

Large and Unobstructive Field of View

Parallax Free

Waterproof up to 10 ft / 3m, Durable 7075-T6 Aluminum Housing, and designed to survive 30,000+ rounds

Clear Lens with Protective Coatings

Top Loading Battery

1 MOA Per Click Elevation & Windage

Complete User-Control Illumination Settings

SRO RMR

Mounts Easily Using the Same Base as the Trijicon RMR®

8 Brightness Settings Including 1 Super Bright Mode and 2 Night Vision Modes

Button "Lock-out" Mode: Secures the Auto-Brightness Setting Feature

- Ideal for everyday carry or hunting

NEW Button "Lock-in" Mode: Secures the User-Chosen Brightness Setting Indefinitely

- Ideal for competition and target shooting

## FITS MANY POPULAR RED-DOT-READY PISTOLS



## SRO™ vs. RMR® COMPARISON GUIDE

	SRO™	RMR® (Adjustable LED)
Magnification	1x	1x
Sight Window	.98 x .89 in. 25 x 22.5mm	.87 x .63 in. 22 x 16mm
Lens	Tempered Glass	Tempered Glass
Adjustments	1 click = 1 MOA	1 click = 1 MOA
Adjustment Range (Elevation & Windage)	150 MOA Total Travel	150 MOA Total Travel
Dimensions (L x W x H)	2.2 x 1.3 x 1.4 in. 55 x 32 x 34mm	1.8 x 1.2 x 1.0 in. 46 x 30 x 25mm
Weight	1.6 oz. (w/ battery) 46g	1.2 oz. (w/ battery) 34g
Illumination Source	LED Powered by CR2032 Battery	LED Powered by CR2032 Battery
Battery Life	Over 3 years of continuous use (when used at 70°F (21°C)) at setting 4 of 8	Over 4 years of continuous use (when used at 70°F (21°C)) at setting 4 of 8
Brightness Settings	Automatic & 8 Adjustable Settings	Automatic & 8 Adjustable Settings



\*Extreme temperatures (high or low) will affect lithium battery performance.